



RSR

45/950~2600MHz Satellite Optical Receiver

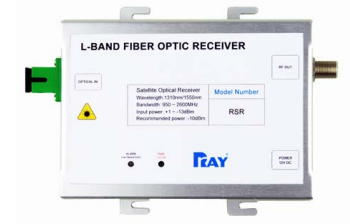

Application

DVB-S(Satellite) Network Solutions

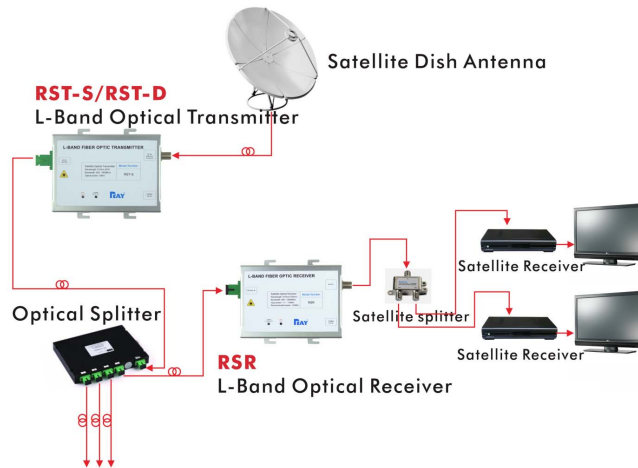

Features

1. Wall mounted aluminum casing.
2. Good heat dissipation.
3. For HFC networks with multiple users.

Datasheet

Parameter	Unit	Index
Work Wavelength	nm	1290~1600
Input Power Range	dBm	-13~+1
Frequency Range	MHz	45/950~2600
Input Level = 0dB	dB μ V	88
Input Level = -3dB	dB μ V	82
Input Level = -6dB	dB μ V	74
Input Level = -9dB	dB μ V	68
Input Level = -12dB	dB μ V	63
CNR	dB	45
IMD	dB	40
Power consumption	W	1.8
Power supply	V DC	12
RF connectors	/	F female
Optical connector(s)	/	SC/APC
Dimension	mm	118*210*40
Weight	kg	0.23